

# VD81 - Compact Vacuum Meter Piezo, Data Logger

Absolute Pressure 1600 to 1 mbar



## VD81 at a glance

- Chemically resistant ceramic sensor with FKM sealing
- Vacuum connection by small flange, G1/4 female thread or screw in hose nozzle
- High repeatability
- Very good long term stability
- Battery life time up to 5000 h

## Features of the VD8 product family

- Operation with battery or power supply for mobile use and fixed installation
- Display for direct reading of measurement data
- Data logger: save up to 2000 measurements in the vacuum meter
- Versatile and easy to use
- Operating modes: continuous operation for long-term measurements or automatic switch off for battery saving
- Setting option: storage of minimum and maximum pressures
- Long battery lifetime thanks to clocked measurements
- Pressure units mbar, Torr, hPa
- USB interface for easy push button data transfer to PCs, but no PC connection is necessary during measurements
- Easy configuration and readjustment of the vacuum meter by VacuGraph™ software or directly on the gauge
- VacuGraph™ Windows software to visualize, analyze and save measurements

# VD81 - Compact Vacuum Meter Piezo, Data Logger

## Absolute Pressure 1600 to 1 mbar



### Technical Data



Measurement Principle	Piezo resistive, independent of gas type
Measurement Range	1600 - 1 mbar (1200 - 1 Torr)
Max. Overload	4 bar absolute
Accuracy	0.3% f. scale end
Resolution	1 mbar
Measurement Rate	1.0 s (0.1 s if logging rate is set accordingly)
Logging Rate	0.1 s, 1 ... 6000 s
Materials With Vac. Contact	Stainless steel 1.4305, Al <sub>2</sub> O <sub>3</sub> ceramic, FKM
Operating Temperature	+5...+50 °C
Storage Temperature	-20...+60 °C
Power Supply	9 V battery or 12...15 VDC external
Power Consumption	Approx. 2 mW (clocked)
Serial Interface	Mini-USB, Type B, 5pin, female, Virtual Com Port protocol
Electrical Connection	Mini-jack 2.5 mm for plug-in power supply
Vacuum Connection	Small flange DN 16 ISO KF, G1/4 female or hose nozzle (accessory VD81SW1)
Display	LCD 12 mm
Protection Class	IP40
Weight	Approx. 200 g (battery included)

# VD81 - Compact Vacuum Meter Piezo, Data Logger

Absolute Pressure 1600 to 1 mbar



## Dimensions in mm

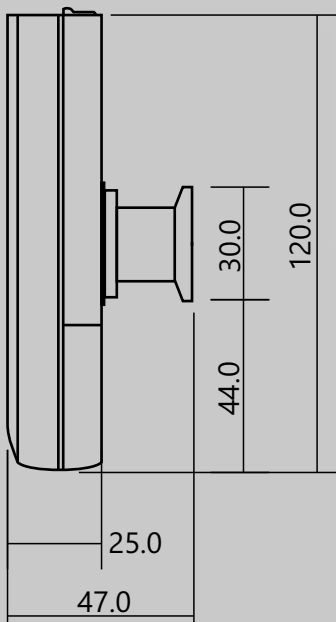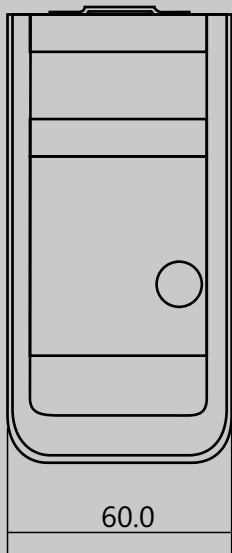

## Model designations

- VD81 Compact vacuum meter  
DN 16 ISO-KF with G 1/4 female thread

## Accessories

- VD8ZUB accessory set consisting of:
  - VD8CASE protective plastic case
  - VD8N4 power supply 15 V, incl. change-over plug, EURO, US, UK, AUS
  - VD8ALK alkaline battery 9 V (vacuum tested);
  - WUSB0002 interface cable, 2 m, USB;
  - VGR VacuGraph Windows® software

For further accessories and information see our VD8 brochure.

# VD81 - Compact Vacuum Meter Piezo, Data Logger

Absolute Pressure 1600 to 1 mbar

---



Thyracont Vacuum Instruments GmbH

Max-Emanuel-Straße 10

94036 Passau, Germany

Phone: +49 (0)851 95986 0

Email: [info@thyracont-vacuum.com](mailto:info@thyracont-vacuum.com)

Alterations reserved, version 20180202